


FIXED TWIST-LOCK DIMMING RECEPTACLE (NEMA 7P/5P)

JL-240X/TX



JL-240XA

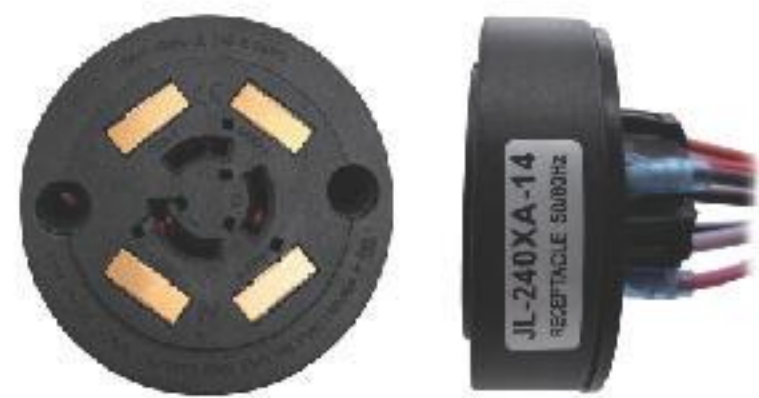

JL-240TXA



JL-240XB



JL-240TXB

PRODUCT SUMMARY

All the JL-240 series photocontrol receptacles were designed for the lanterns those intended to have an ANSI C136.10 receptacle to fit a twist-lock photocontrol. This series conform newly published ANSI C136.41 to allow a LED lamp multi-controlled through the receptacle.

This series offers 2 or 4 gold-plated low voltage pads on the top surface to fit photocontrol has ANSI C136.41 conforming spring contacts, and offers 2 or 4 wiring leads at rear side for signal connection.

This series also offers 360° rotation limiting feature to conform ANSI C136.10 requirements, in case rotatable.

FEATURES

- Glass-Fiber strongen PBT
- Gilded Pads made from phophor bronze Nickel plated and gilded over 0.7um
- Gold plating per ASTM B 522
- Silicone gasket offered
- TPE gasket gathered to flange for easier assembling

SPECIFICATIONS

| | |
|-----------------------|---|
| Model No. | JL-240X/TX |
| Applicable Volt Range | 0~480VAC |
| Rated Frequency | 50/60Hz |
| Load Rating | 15A |
| Signal Control | 0-30 VDC, 250 mA Max |
| Lead | 16AWG,14AWG 6" min |
| Ambient Temperature | -40°C ~ +70°C |
| Related Humidity | 96% |
| Outdoor Wiring Cable | ● |
| Certifications |   CB CE UK CA |